




Automatic Low Table Models



PW-0860LS2R

- Options**
- Detection for strap not in position
 - Detection for no strap
 - Stainless steel structure SUS #304
 - Single phase (1Ø)

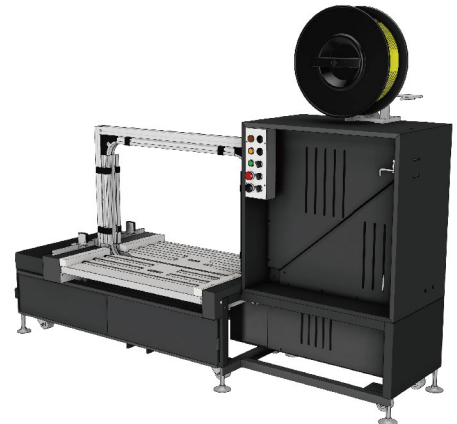


PW-0860CLS2R

PW-0860LS2R/ PW-0860CLS2R Fully Automatic Strapping Machine

LS2R: Roller Table Drive + 2 Sensors with Steel Arch in Low Profile


CLS2R: Roller Table Drive + 2 Sensors with Aluminium Arch in Low Profile

Power	3Ø, 220/380/415/440V, 50/60Hz
Standard Arch Size	W 850 x H 600 mm (other sizes made on request)
Strap Width	9, 12, 15, 19 mm (PET option)
Strapping Tension	0 ~ 70 Kgs
Strapping Speed	2.4 sec./strap (25 strap/min.)
Max.Loading Weight	100 Kgs
Working Height	450 mm
Machine Size	L 2260 x W 760 x H 1774 mm

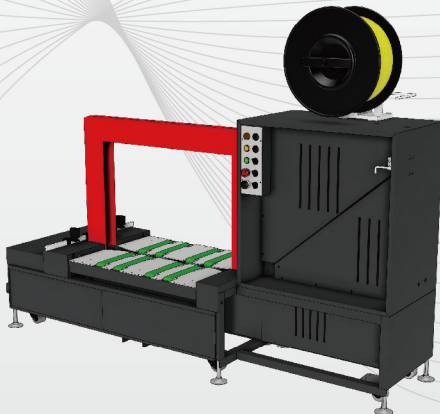

PW-0860LS2B

- Options**
- Detection for strap not in position
 - Detection for no strap
 - Stainless steel structure SUS #304
 - Single phase (1Ø)

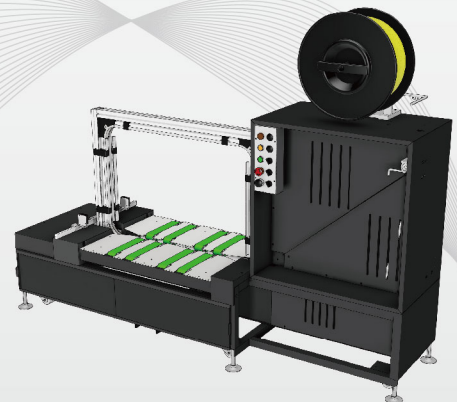

PW-0860CLS2B

PW-0860LS2B/ PW-0860CLS2B Fully Automatic Strapping Machine

LS2B: Belt Table Drive + 2 Sensors with Steel Arch in Low Profile

CLS2B: Belt Table Drive + 2 Sensors with Aluminium Arch in Low Profile

Power	3Ø, 220/380/415/440V, 50/60Hz
Standard Arch Size	W 850 x H 600 mm (other sizes made on request)
Strap Width	9, 12, 15, 19 mm (PET option)
Strapping Tension	0 ~ 70 Kgs
Strapping Speed	2.4 sec./strap (25 strap/min.)
Max.Loading Weight	20 Kgs
Working Height	450 mm
Machine Size	L 2260 x W 760 x H 1774 mm