

PW-2862UHE Horizontal Palletizing Strapping Machine

UHE: High Speed Strapping Head in Horizontal Movement

Power	3Ø, 220/380/415/440V, 50/60Hz
Arch Size	W 1250 x H 1000 mm (other sizes made on request)
PET Strap Width	9, 12, 15, 19 mm x 406 (ID)
Strapping Tension	40 ~ 400 Kgs (according to PET width)
Strapping Speed	12 sec./strap. (Exclude Convey Time)
Sealing Method	Electric Heat Seal
Air	6 KGf/CM²
Head Moving Interval	250mm (other sizes made on request)
Detection	Detection for strap not in position Detection for no strap Detection for strap failure
Min. Conveyor Height	500 mm
Machine Size	L2087xW1651xH2130 mm

Features

- Height memory function
- Tension pool with no strap detection
- Strap Feed & Reverse :
Servo motor controlled
- U Series strapping tension force up to 400 kgs (base on 19mm PET)

Options


- Conveyor system
- Custom Made

PP strap adustable tension

- 40~130 Kgs (9mm)
- 40~180 Kgs (12mm)
- 40~240 Kgs (15mm)
- 40~260 Kgs (19mm)

PET strap adustable tension

- 40~200 Kgs (9mm)
- 40~250 Kgs (12mm)
- 40~350 Kgs (15mm)
- 40~400 Kgs (19mm)

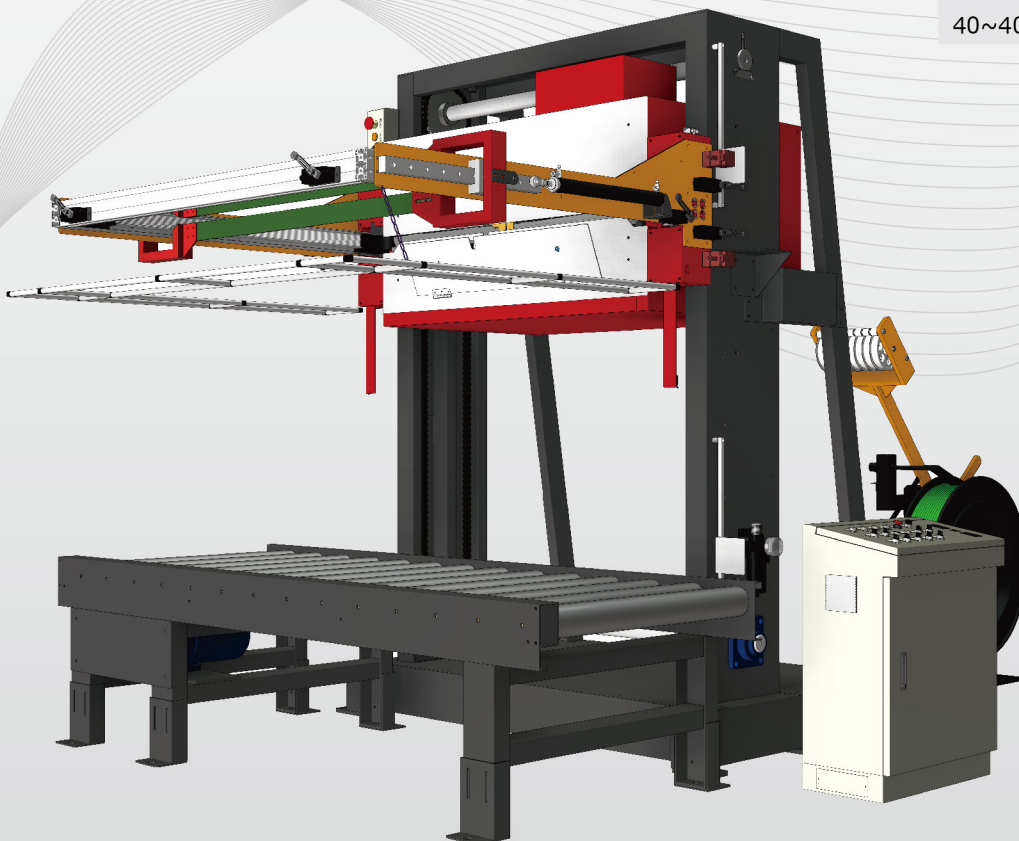

PW-2862UHE