

## PW-4865UYA Vertical Palletizing Strapping Machine

UYA:High Speed Strapping Head for Side Sealing

Power	3Ø, 220/380/415/440V, 50/60Hz
Standard Arch Size	W 1650 x H 1600 mm (other sizes made on request)
PET Strap Width	9, 12, 15, 19 mm x 406 (ID)
Strapping Tension	40 ~ 400 Kgs (according to PET width)
Strapping Speed	15 sec./strap. (Exclude Conveyor Time)
Sealing Method	Electric Heat Seal
Air	6 Kg/cm <sup>2</sup>
Head Moving Interval	250 mm (other sizes made on request)
Detection	Detection for strap not in position Detection for no strap Detection for straping failure
Min. Conveyor Height	250 mm
Machine Size	L 4150 x W 728 x H 2060 mm

## Features

- Strapping head move:Pneumatic driven
- Tension pool with no strap detection
- Strap feed & reverse:  
Servo motor controlled
- U Series strapping tension force up to 400 kgs (base on 19mm PET)

## Options


- Conveyor system
- Custom Made

### PP strap adustable tension

- 40~130 Kgs (9mm)
- 40~180 Kgs (12mm)
- 40~240 Kgs (15mm)
- 40~260 Kgs (19mm)

### PET strap adustable tension

- 40~200 Kgs (9mm)
- 40~250 Kgs (12mm)
- 40~350 Kgs (15mm)
- 40~400 Kgs (19mm)

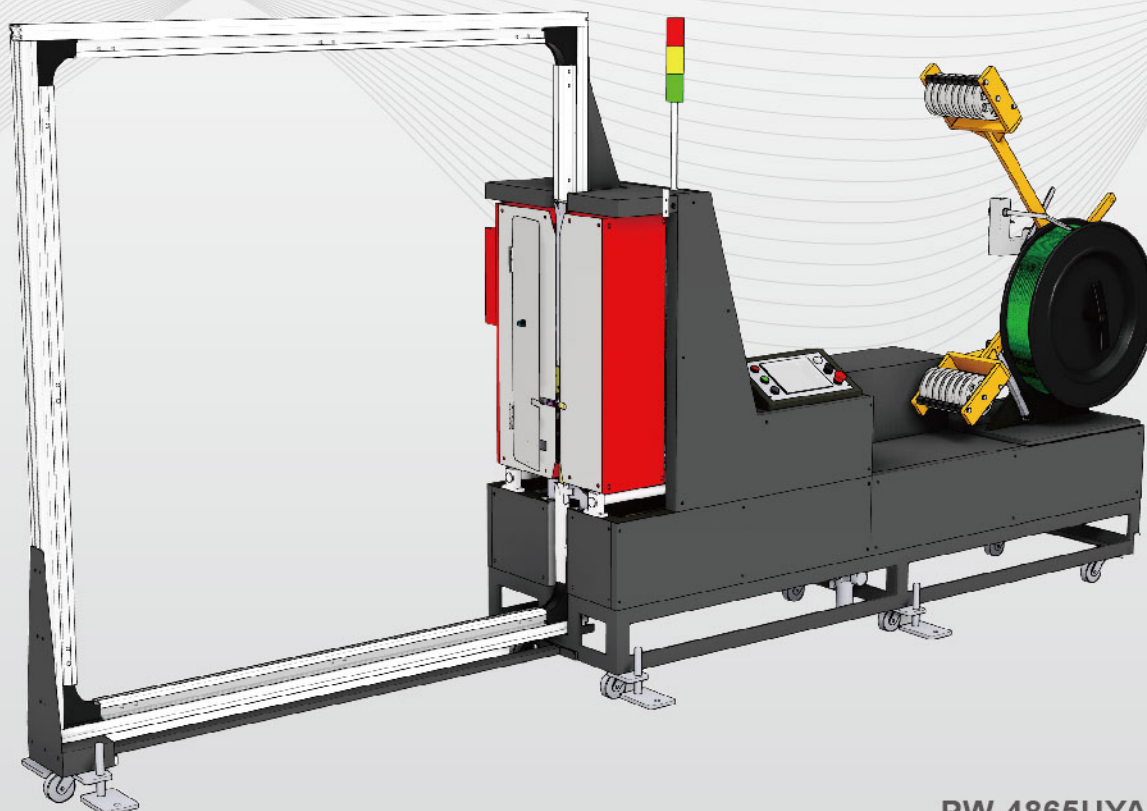

PW-4865UYA