

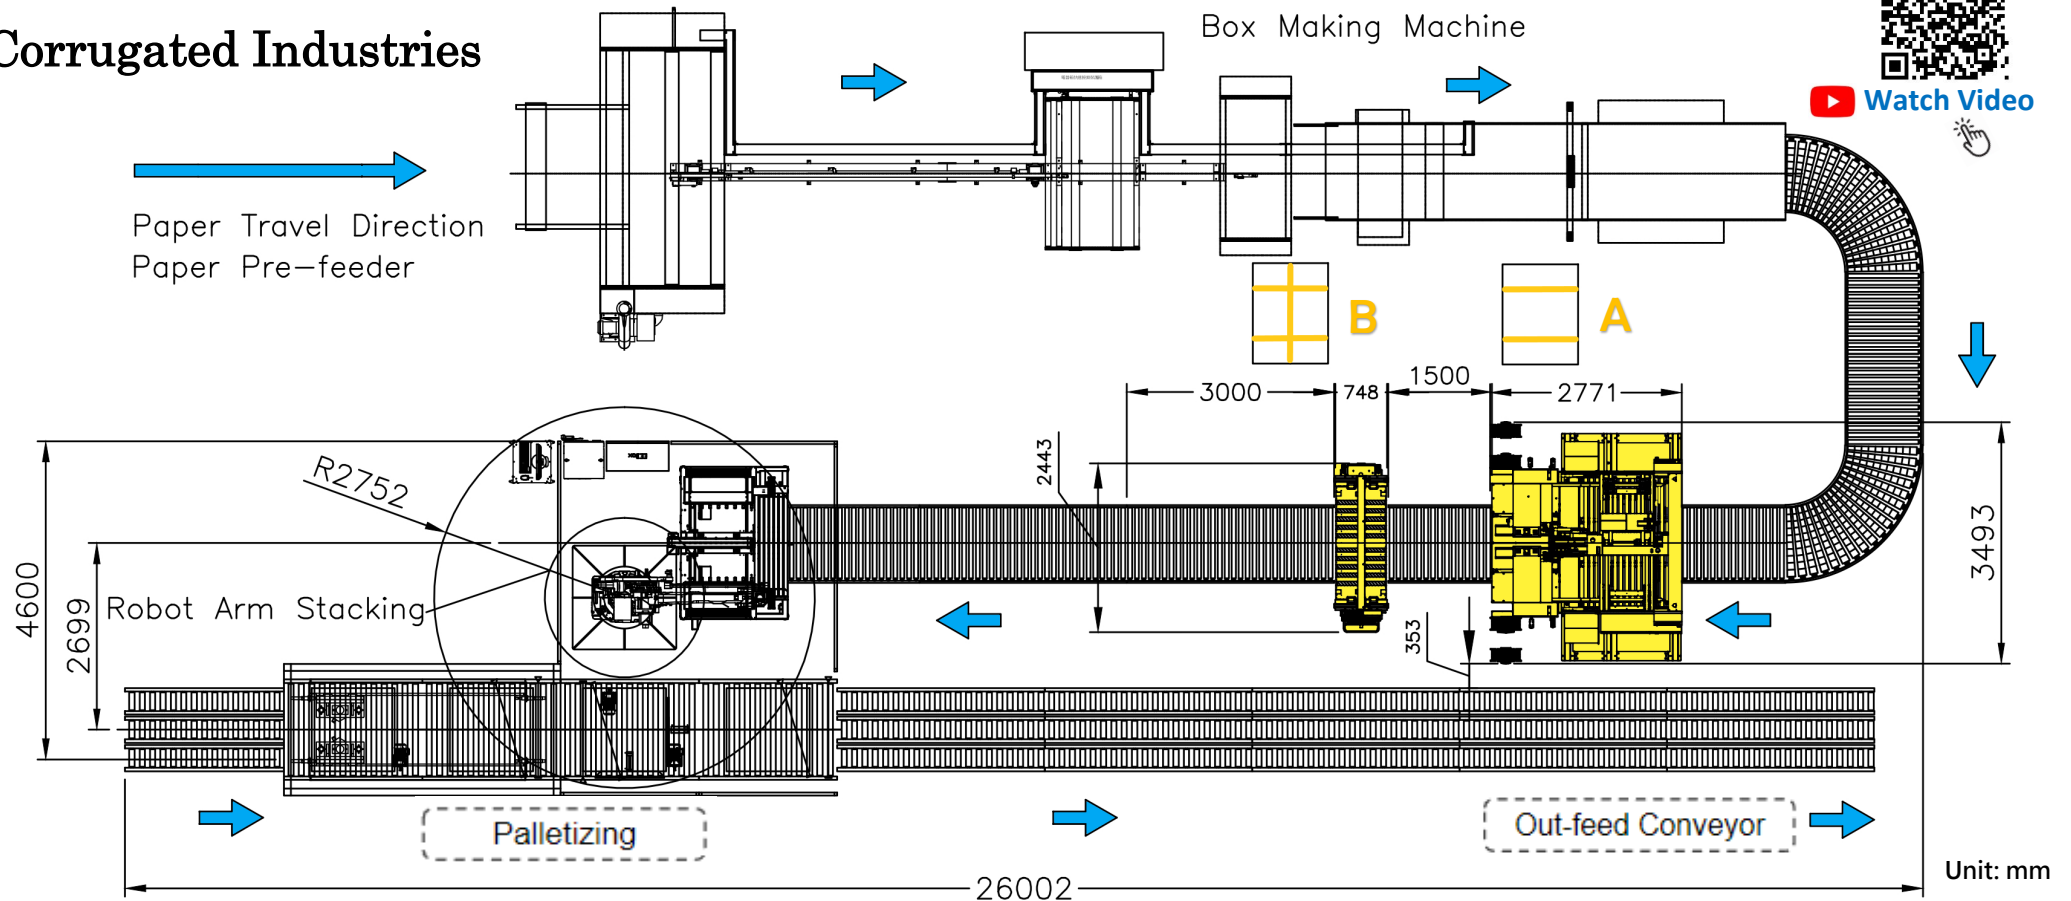


Application for Corrugated Industries

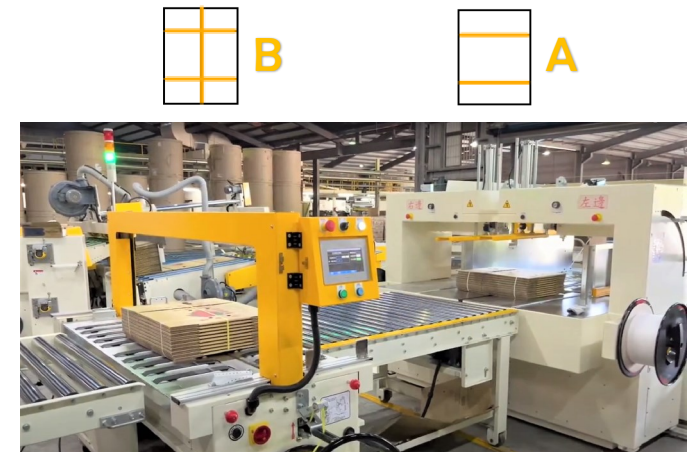

[Watch Video](#)

Production Process

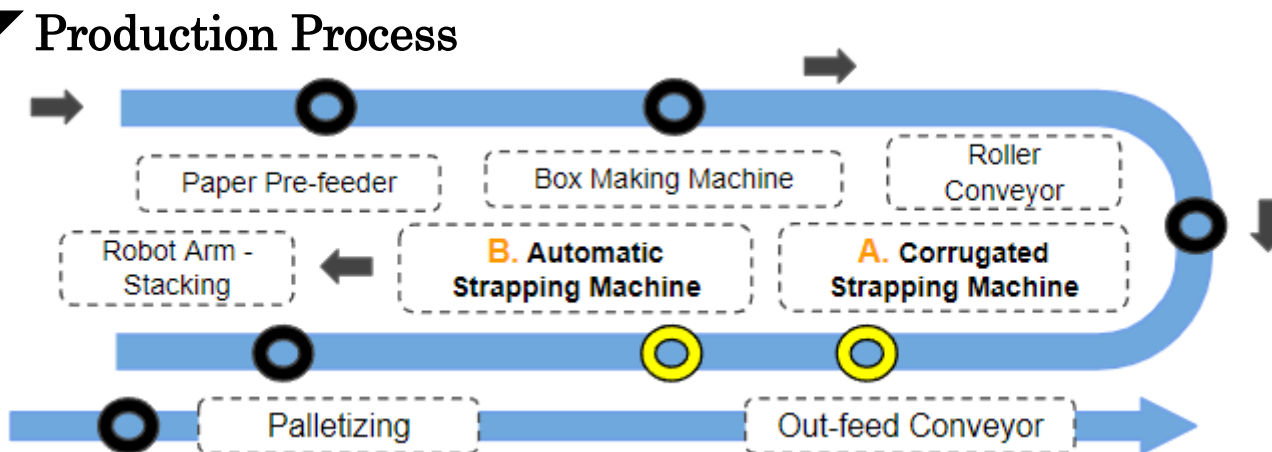

B. PW-4850DUATS1B+T

Fully Automatic Strapping Machine

PP Strap	W9mm x t0.6mm x 200Ø(ID)
PLC	Mitsubishi
HMI	Pro-face 7"
Working Height	880 mm
Strap Tension	1 - 30 kgs
Machine Size	L2443 x W782 x H2021 mm
Carton Size	Min.: L300 x W400 x H50 mm Max.: L1350 x W1350 x H350 mm
Arch Size	W1650 x H500 mm (Other size made on request)


FEATURES
• Belt Conveyor Speed : 10 - 30M/min.
• With Auto Feed
• With Loop Ejection
• Electronic Tension Control
• Low Strap detection
• Strap in position sensor
• Suitable for 5/6mm PP
• Capacity : 30 straps/min.

A. PW-1300DHCM

Corrugated Strapping Machine - For Bundling, Strapping Corrugated Boxes


FEATURES
• Strapping Pattern : Single or Double
• With Squaring and Pusher Function
• With Top Press Function
• Machine shifts for in-line process
• Strap Distance Set-up
• Capacity : 23 bundles/min.

PP Strap Use	W5mm x t0.55mm x 200Ø(ID)
PLC	Mitsubishi
HMI	Pro-face 7"
Air Supply	6Kgf/cm ²
Air Flow	100L/min.
Power	7Kws
Working Height	880 mm
Machine Size	L3280 x W2758 x H2340 mm


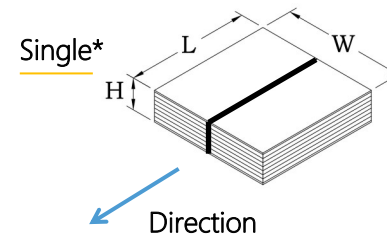



1300DHCM	Length	Width	Height	Distance
Single*	180 - 1300	380 - 920	50 - 330	n/a
Double**	180 - 1300	450 - 1300	50 - 330	360 - 1000

Double**

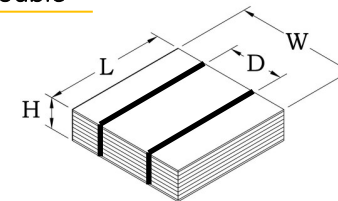


Different Strapping Choice :

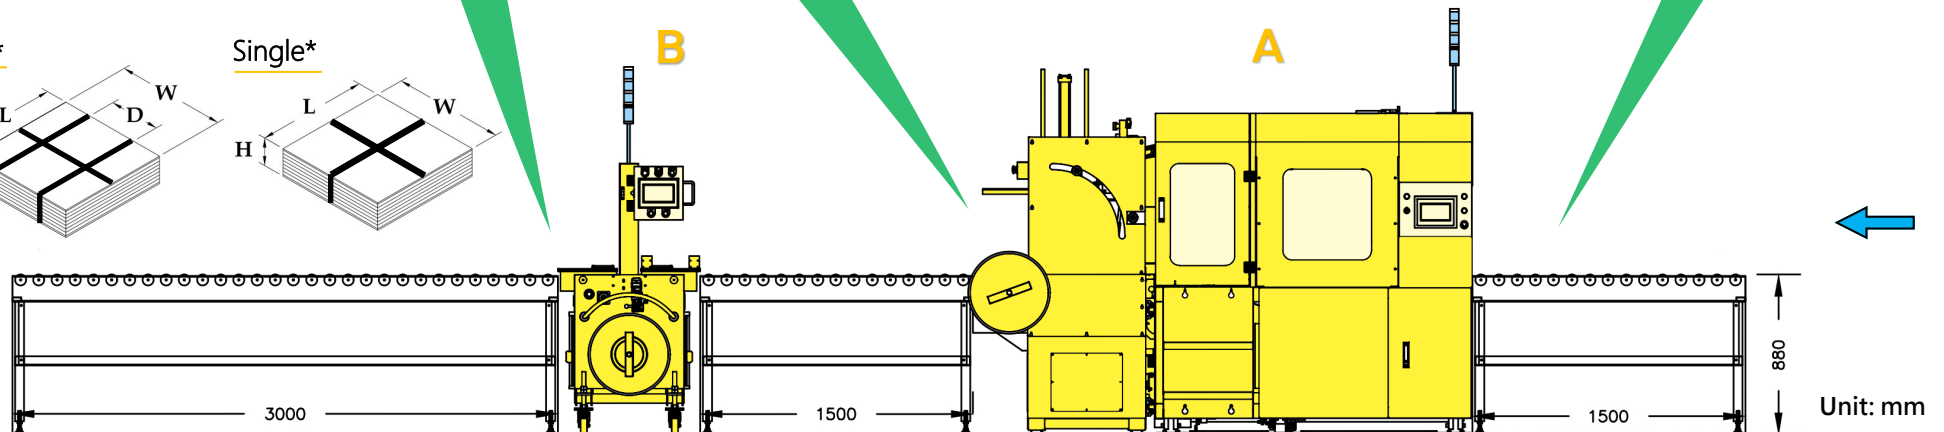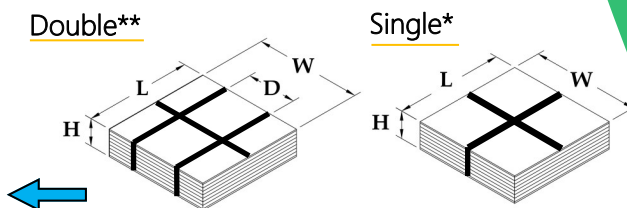

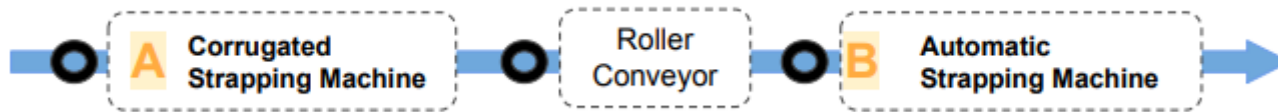

※ From left to right operation process

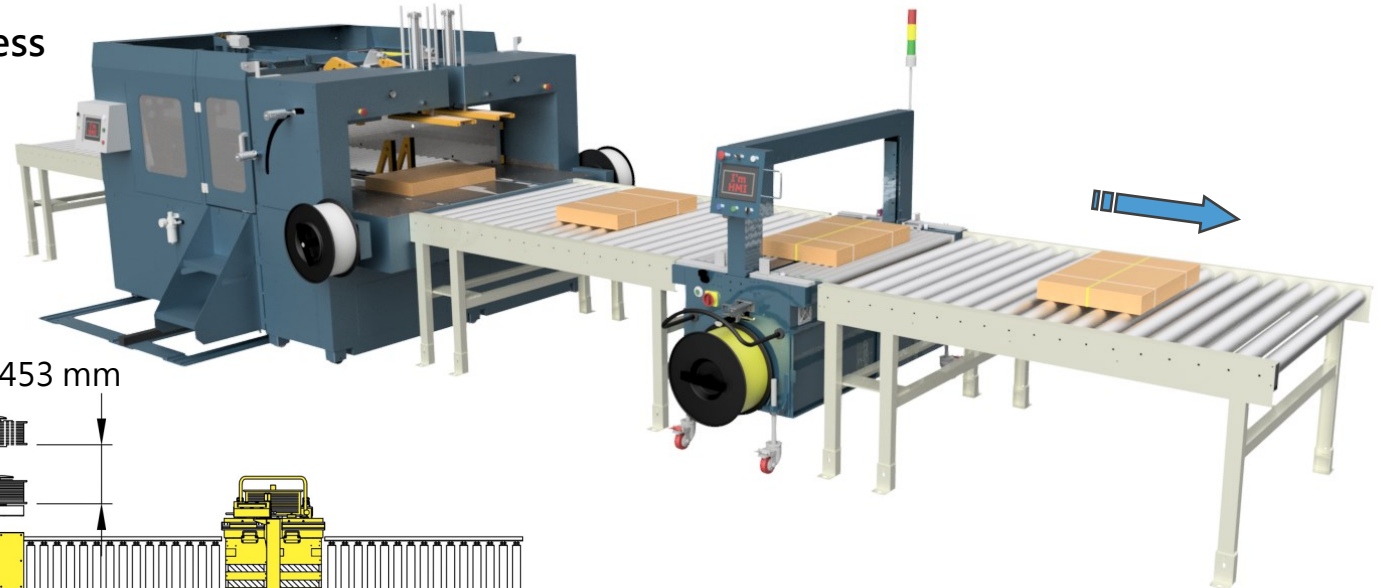

Machine can shifts by 453 mm

