



# PW-DHCM

**In-line bundling / squaring / strapping machine  
for the Corrugated Industry**

Up to 20 bundles/min

\* 5mm PP strap



Video Footage



# Standard Features:

## ●Reliable Strap Head

Strapping unit is servo motor driven and all mechanical parts are extensively proven to be simple to operate and easy to maintain through usage life.

## ●Reliable Strap Sealing

Enhanced sealing design, strap ends are securely sealed even better.

## ●Flexible Strapping Method

Simple touch panel control to select between *single* or *double* strapping modes.

## ●Automated Setup

Once entered bundle *width (W)* and *strap gap (D)*, the strapping heads will adjust to position accordingly .

## ●All power driven

All the chassis are with motor driven for alignment, no manpower requires.

## ●Control Unit


PLC controlled with HMI touch panel.

## ●In-line

Strapping along the flute and compatible with most corrugated production line to maximize automation requirements.

# Specification:



Power Supply	Made upon Request
Air Supply	6Kgf/cm <sup>2</sup> 100L/min
Sealing Type	Heat Sealing
PP Strap Width	5 mm
Strap Core Size	Core diameter: Ø200
Capacity	20 bundles / min
Strap Tension	1 - 30 kg
Work Height	880 mm (minimum)



Product link







Stack sizes: Units : mm

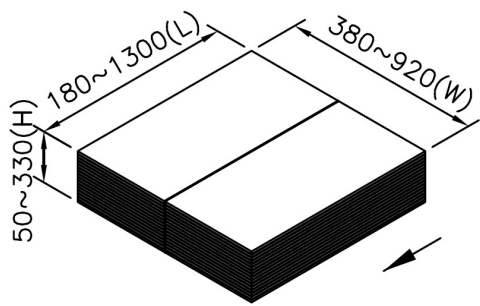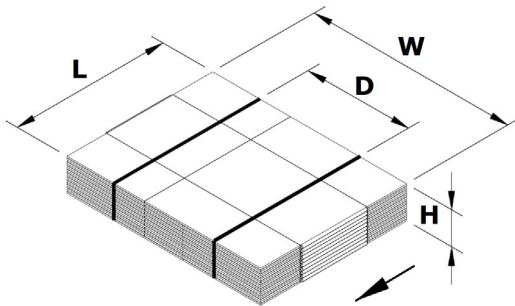

*\*This model Dose Not have off-center bundle strapping.*


Model PW-DHCM		Length (L) mm		Width (W) mm		Bundling Height (H) mm		Strap Gap (D) mm	
1300	Strapping Method	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
	Single Strap	180	1300	380	920	50	330	n/a	n/a
	Double Strap	180	1300	450	1300	50	330	360	1000

Machine Dimension (PW-1300DHCM)

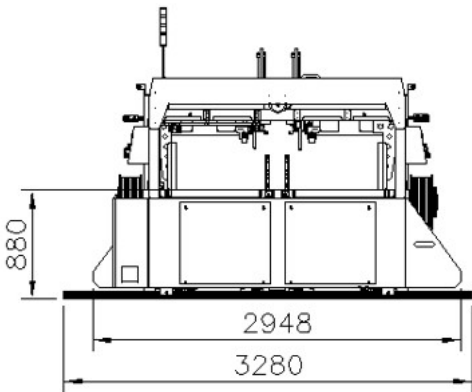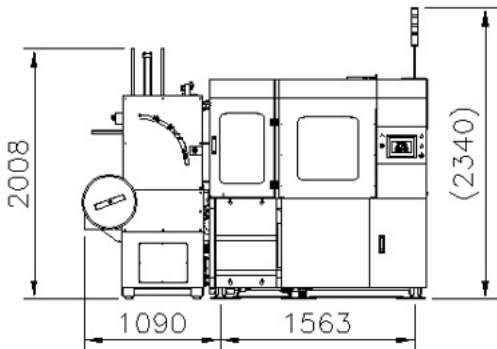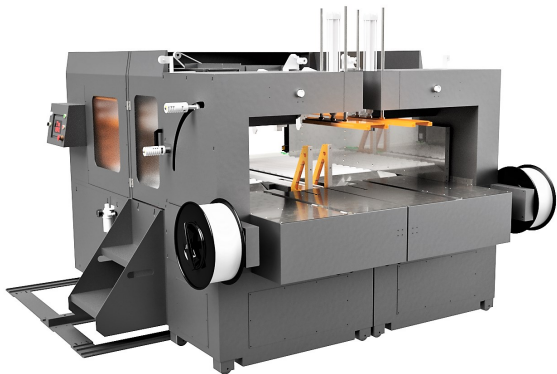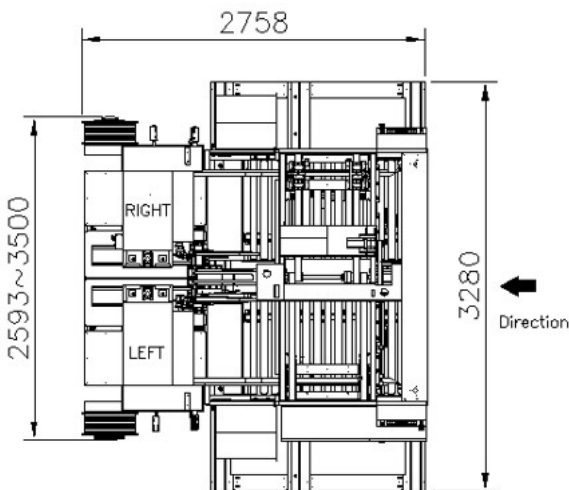





## In-line Options:

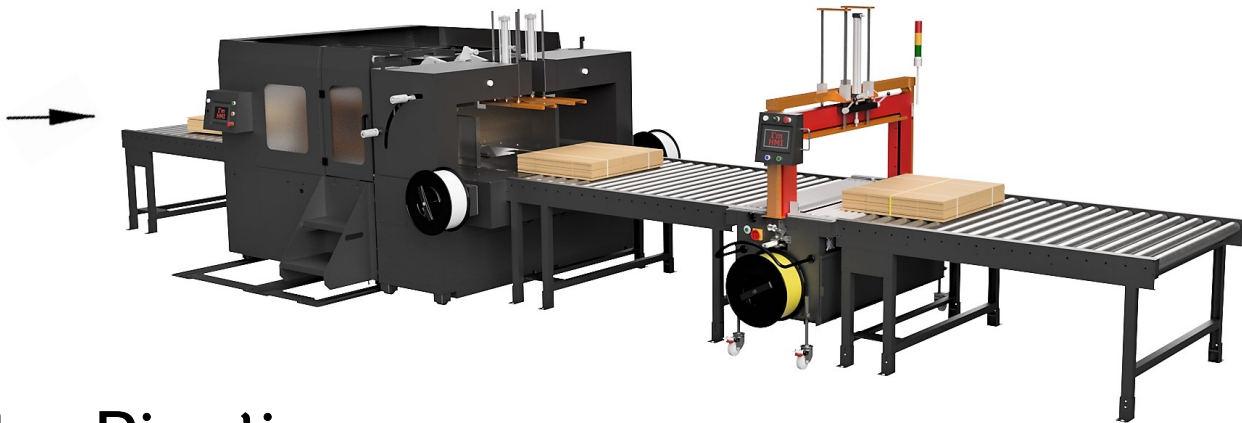


## Flow Directions:



*DHCM squaring*




*DHCM single or parallel strapping*



*DUAT cross strapping  
(Fruit & Vegetable boxes)*

- A/C for control cabinet
- Infeed and / or outfeed conveyor
- PW-DUAT Fully Automatic Strapping Machine, with 9mm PP strap  
model:PW-4850DUATS2R(Roller) or PW-4850DUATS2B(Belt)
- Special coating according to RAL color scale standard
- Safety guard at infeed and outfeed



OFFICIAL website



Youtube Channel



**Address :** No. 56, 35th Rd., Taichung Ind. Park, Taichung 407, Taiwan

**E-mail :** packway07@packway.com

**TEL :** + 886 4 23591858

**FAX :** + 886 4 23597489